

DUAL SH DBC® SST w/ Lower Faucet

Height: 36.0" Width: 18.0" Depth: 24.8"
(91.4cm) (45.7cm) (63.0cm)



- Brews 1/2, 1 or 1 1/2 gallon (1.9, 3.8 or 5.7L) batches
- Brews up to 19.3gallons (73.1L) of perfect coffee per hour
- No hot surfaces in coffee holding area
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present
- Patented server heat control automatically shuts off once target temperature is reached (Can be set to 175°-190°F (79.4°-87.8°C))
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- SplashGard® funnels deflect hot liquids away from the hand
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, pulse brew, and pre-infusion timing
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools
- Servers not included unless otherwise noted

 Server(s) sold separately

Agency:



Specifications

Product #: 33500.0042

Funnel: Smart Funnel

Water Access: Plumbed

Faucet: Lower

Interface: Wireless

Finish: Stainless

Additional Features

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120/208-240	23.9-29.1	4980-6800	No	-	302	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

 **WARNING:**


CAD Drawings

2D	Revit	KLC
●		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

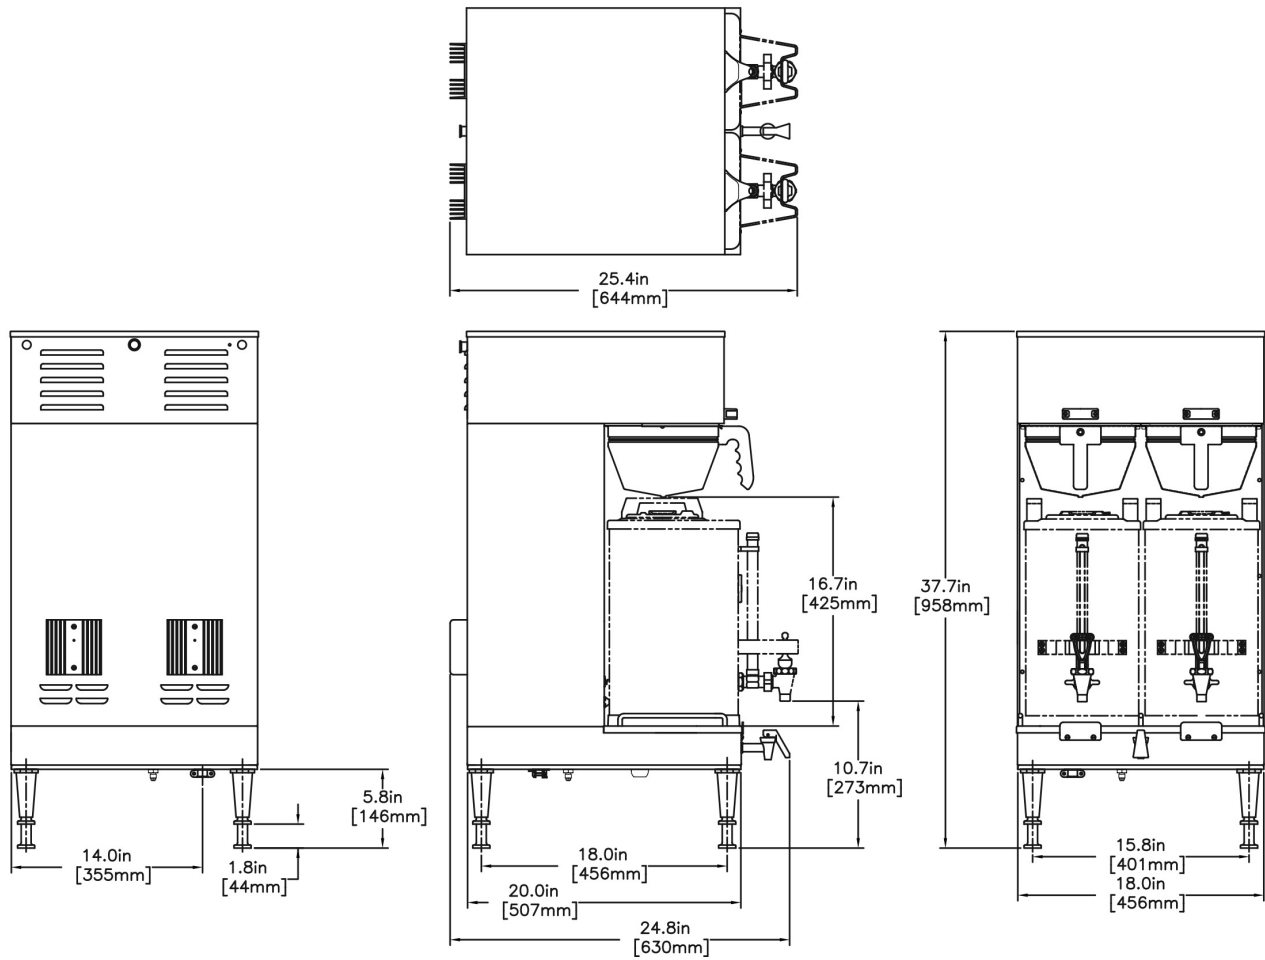

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	36.0 in.	18.0 in.	24.8 in.	39.8 in.	21.6 in.	27.1 in.	90.000 lbs	13.493 ft³
Metric	91.4 cm	45.7 cm	63.0 cm	101.0 cm	54.9 cm	68.9 cm	40.824 kgs	0.382 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories: DUAL SH DBC® SST w/ Lower Faucet(33500.0042)

 FILTERS, GOURMET 500 500/1 50/CL Product #: 20138.1000	 DRIP TRAY KIT, DUAL & SH Product #: 27150.0000	 1SH STAND, 120V Product #: 27825.0000⁷	 1SH STAND, 120V BLK Product #: 27825.0003⁷	 2SH STAND, 120V Product #: 27875.0000⁷
 2SH STAND, 120V BLK Product #: 27875.0003⁷	 FUNNEL ASSY, W/ INSERTS SMTF Product #: 32643.0000²	 CARD ASSY, RECIPE TRANSFER (BRW) Product #: 34447.0016	 SYSTEM, WQ-55(3).2L Product #: 56000.0002¹	 SYSTEM, WQ-55(3).2 Product #: 56000.0005¹
 SYSTEM, WEQ-25(2).2 Product #: 56000.0028¹	 SYSTEM, WEQ-35(3).2L Product #: 56000.0034	 CARTRIDGE, WQ-55 (3).2L Product #: 56000.0102¹	 CARTRIDGE, WQ-55(3).2 Product #: 56000.0105¹	 CARTRIDGE, WEQ-25 (2).2 Product #: 56000.0124¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories:DUAL SH DBC® SST w/ Lower Faucet(33500.0042)



CARTRIDGE, WEQ-35
(3).2L

Product #: 56000.0126¹



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Serving & Holding Options: DUAL SH DBC® SST w/ Lower Faucet(33500.0042)

 SH SERVER, 1.5G/5.7L NO FL ADJ TMR Product #: 27850.0001¹	 SH SERVER, 1.5G/5.7L BLK NO FL ADJ TMR Product #: 27850.0004¹	 SH SERVER, 1.5G/5.7L 45 MIN ADJ TMR Product #: 27850.0006¹	 SH SERVER, 1.5G BLK 60 MIN ADJ TMR Product #: 27850.0008¹	 SH SERVER, 1.5G 120 MIN ADJ TMR AUTO OFF Product #: 27850.0009¹
--	--	---	--	--

 SH SERVER, 1.5G/5.7L 240 MIN ADJ TMR Product #: 27850.0016¹	 SH SERVER, 1.5G/5.7L BLK 120 MIN ADJ TM Product #: 27850.0022¹	 SH-S SERVER 1G 60 MIN ADJ TMR Product #: 27850.0046¹
--	---	---



