

Single TF DBC® SST 120V w/Funnel Locks

Height: 35.7" Width: 12.1" Depth: 22.7"
(90.7cm) (30.7cm) (57.7cm)



- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- SplashGard® funnel deflects hot liquids away from the hand
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®
- Funnel locks help improve safety
- Servers not included unless otherwise noted

 Server(s) sold separately

Agency:



Specifications

Product #: 34800.0017

Funnel: Smart Funnel

Water Access: Plumbed

Faucet: Lower

Interface: Wireless

Finish: Stainless

Additional Features

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	18.1	2200	Yes	NEMA 5-20P	102	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	-

 **WARNING:**



CAD Drawings

2D	Revit	KLC
●		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

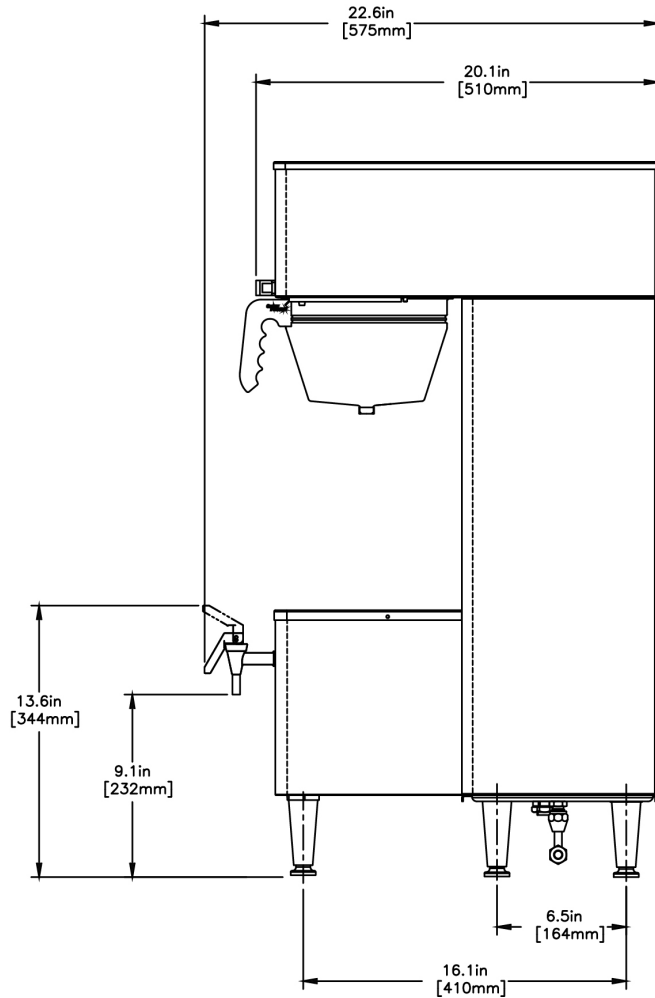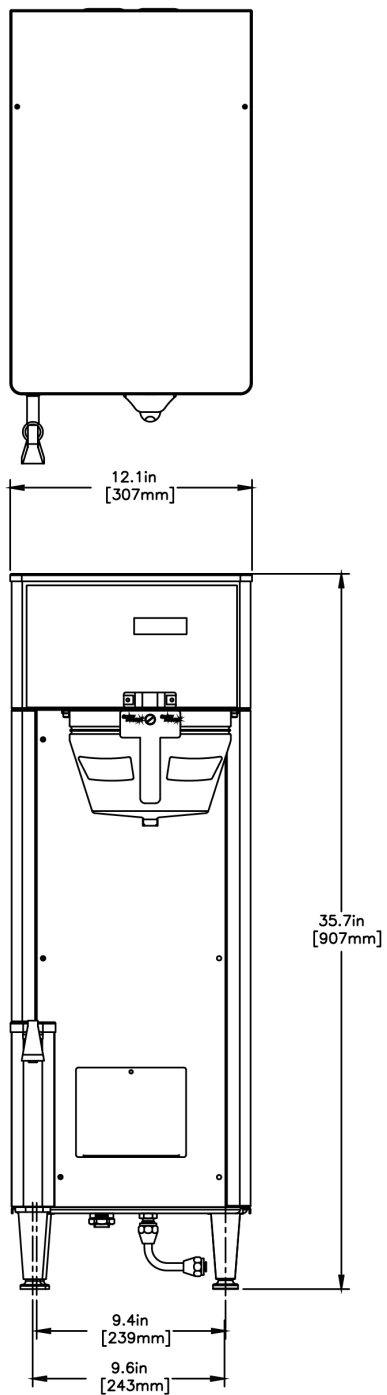

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.7 in.	12.1 in.	22.7 in.	30.8 in.	17.5 in.	26.7 in.	72.510 lbs	8.311 ft ³
Metric	90.7 cm	30.7 cm	57.7 cm	78.1 cm	44.5 cm	67.8 cm	32.891 kgs	0.235 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories: Single TF DBC® SST 120V w/Funnel Locks(34800.0017)

 FUNNEL ASSY, W/ INSERTS SMTF Product #: 32643.0000²	 G9-2T DBC, BLK Product #: 33700.0001	 CARD ASSY, RECIPE TRANSFER (BRW) Product #: 34447.0016	 WATER FILTER, EQHP-10L Product #: 39000.0001³	 WATER FILTER, EQHP-10 Product #: 39000.0004³
 TF SERVER, 1G DSG GEN3 Product #: 42700.0200¹	 TF SERVER, 1G DSG GEN3 NOBASE Product #: 42700.0250¹	 TF SERVER, 1.5G DSG GEN3 Product #: 42750.0200¹	 TF SERVER, 1.5G DSG GEN3 NOBASE Product #: 42750.0250¹	 TF SERVER, 1G MECH GEN3 Product #: 44000.0200¹
 TF SERVER, 1G MECH GEN3 NOBASE Product #: 44000.0250¹	 TF SERVER, 1.5G MECH GEN3 Product #: 44050.0200¹	 TF SERVER, 1.5G MECH NOBASE GEN3 Product #: 44050.0250¹	 SYSTEM, WQ-55(2)5L Product #: 56000.0001¹	 SYSTEM, WQ-55(2)5 Product #: 56000.0004¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories:Single TF DBC® SST 120V w/Funnel Locks(34800.0017)

				
SYSTEM, WEQ-10(1.5)5L	SYSTEM, WEQ-10(1.5)5	CARTRIDGE, WQ-55(2)5L	CARTRIDGE, WQ-55(2)5	CARTRIDGE, WEQ-10 (1.5)5L
Product #: 56000.0024 ¹	Product #: 56000.0027 ¹	Product #: 56000.0101 ¹	Product #: 56000.0104 ¹	Product #: 56000.0121 ¹



CARTRIDGE, WEQ-10
(1.5)5

Product #: 56000.0122¹

Serving & Holding Options: Single TF DBC® SST 120V w/Funnel Locks(34800.0017)

 TF SERVER, DSG2 1G/3.8L Product #: 42700.0000¹	 TF SERVER, DSG2 1.5G SST Product #: 42750.0000¹	 TF SERVER, DSG2 1.5G BLK Product #: 42750.0001¹	 TF SERVER, DSG2 1.5G CD Product #: 42750.0003¹	 TF SERVER, 1G/3.8L MECH Product #: 44000.0000¹
---	--	--	---	---

 TF SERVER, 1.5G/5.7L MECH Product #: 44050.0000¹	 TF SERVER, 1.5G/5.7L MECH BLK Product #: 44050.0001¹
---	---

