

Single AXIOM® 15 GPR w/1.5 Gal Srvr

Height: 20.5" Width: 8.4" Depth: 22.0"
(52.1cm) (21.3cm) (55.9cm)



- Adjusts automatically to varying water pressure
- Automatic warmer shut-off
- Electronic diagnostics and built-in tank drain make service easier
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock-out and tank temperature, set easily from the front of the machine
- Brews 1/2gal or 1gal (1.9 and 3.8L) batches into 1.5 GPR portable server (server included)
- Gourmet funnel allows use of heavier throw weights of coffee
- Hot water faucet does not affect brew level
- SplashGard® funnel deflects hot liquids away from the hand
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Energy-saver mode reduces tank temperature during idle periods
- PROP 65 Warning Decal included in packaging with equipment

Agency:



Specifications

Product #: 38700.0043

Faucet: Upper

Water Access: Plumbed

Finish: Stainless

Funnel: Gourmet Funnel

Additional Features

Smart Funnel Compatible

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	13.3	1600	Yes	NEMA 5-15P	72	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings

2D	Revit	KLC
●		




WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

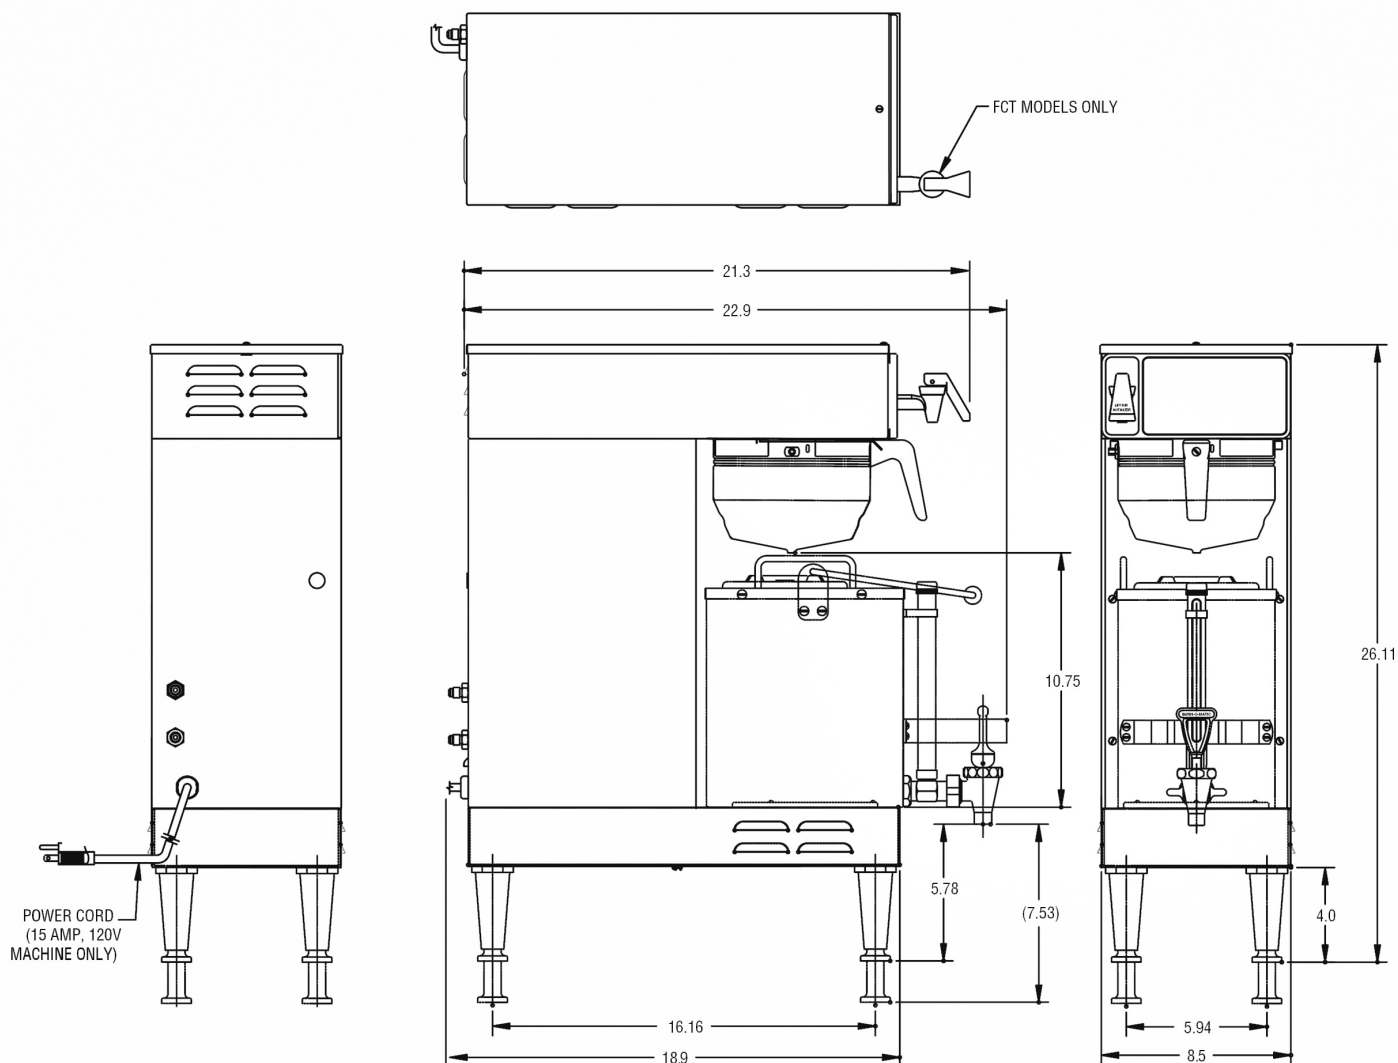

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	20.5 in.	8.4 in.	22.0 in.	30.1 in.	13.5 in.	25.9 in.	42.200 lbs	6.098 ft³
Metric	52.1 cm	21.3 cm	55.9 cm	76.3 cm	34.4 cm	65.9 cm	19.142 kgs	0.173 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories:Single AXIOM® 15 GPR w/1.5 Gal Srvr(38700.0043)

 RWS1, 120V Product #: 12203.0010¹	 FILTERS,C GOURMET 500/2 50/CL Product #: 20157.0001	 FUNNEL AY,W/DECAL GRT "C"7.12 Product #: 34559.0000²	 WATER FILTER, EQHP-10 Product #: 39000.0004³	 SYSTEM, WQ-55(2)5 Product #: 56000.0004¹
 SYSTEM, WEQ-10(1.5)5 Product #: 56000.0027¹	 CARTRIDGE, WQ-55(2)5 Product #: 56000.0104¹	 CARTRIDGE, WEQ-10 (1.5)5 Product #: 56000.0122¹		

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



Serving & Holding Options: Single AXIOM® 15 GPR w/1.5 Gal Srvr(38700.0043)



1.5GPR-FF, TOP HNDL

Product #: 20950.0004¹

