

Titan® Dual DBC® 120/208V Brewer

Height: 40.0" Width: 35.6" Depth: 21.7"
(101.6cm) (90.4cm) (55.1cm)



- Brews up to 34.3 gallons (82.2 liters) of coffee per hour, while ensuring "quality in the cup" for each and every cup
- BrewMETER® allows automatic programming of pulse routine
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass
- Funnel has 28oz (.8kg) ground coffee capacity and paper filter retainers to eliminate fold-over
- Titan TF server [not included] is insulated to keep coffee hot for hours
- Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- Servers not included unless otherwise noted

 Server(s) sold separately

Agency:



Specifications

Product #: 39200.0000

Faucet: Lower

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Additional Features

DBC

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/208	33.4	12000	No	-	549	60°F (15.5°C)	3	4	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	-

 **WARNING:**


CAD Drawings

2D	Revit	KLC
●		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

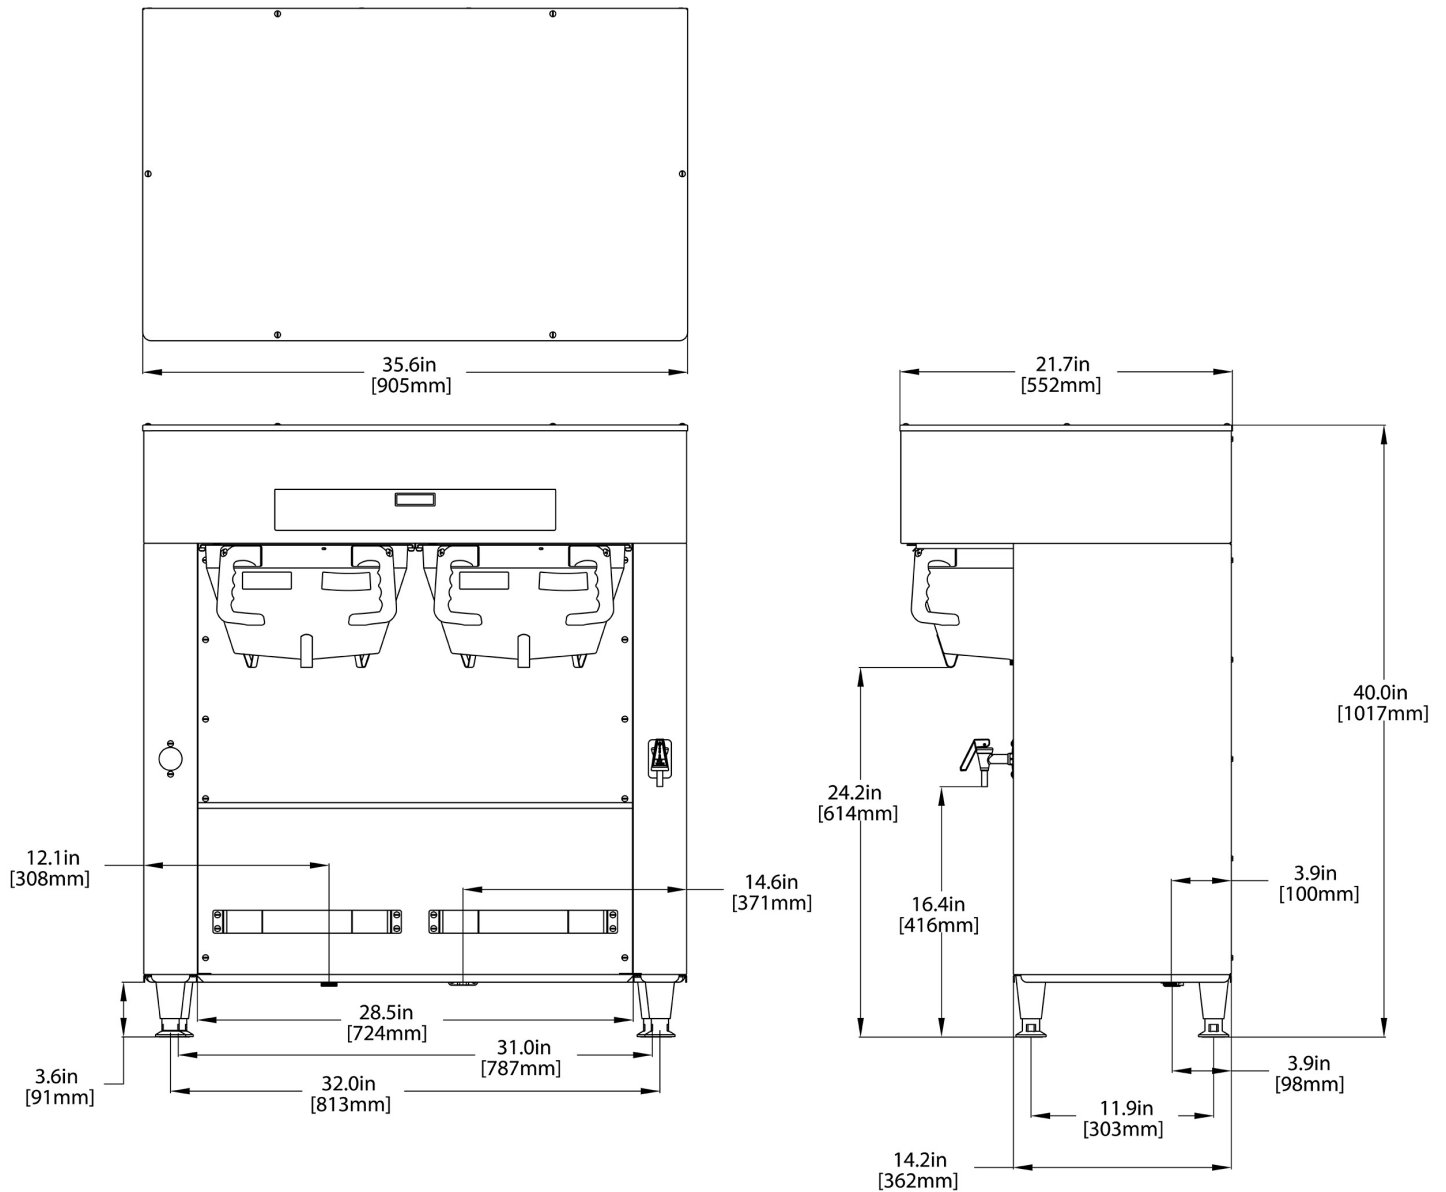

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	40.0 in.	35.6 in.	21.7 in.	43.8 in.	26.5 in.	40.5 in.	152.800 lbs	27.173 ft³
Metric	101.6 cm	90.4 cm	55.1 cm	111.1 cm	67.3 cm	102.9 cm	69.310 kgs	0.769 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories: Titan® Dual DBC® 120/208V Brewer(39200.0000)

 FILTERS, 20x8 252/CS 36/CL Product #: 20111.0000	 FUNNEL ASSY W/ BASKET, TITAN Product #: 40114.0000²	 SYSTEM, WQ-75(5).2L Product #: 56000.0003¹	 SYSTEM, WQ-75(5).2 Product #: 56000.0006¹	 SYSTEM, WEQ-54(5).2L Product #: 56000.0026¹
 SYSTEM, WEQ-54(5).2 Product #: 56000.0029¹	 CARTRIDGE, WQ-75 (5).2L Product #: 56000.0103¹	 CARTRIDGE, WQ-75(5).2 Product #: 56000.0106¹	 CARTRIDGE, WEQ-54 (5).2L Product #: 56000.0125¹	 CARTRIDGE, WEQ-54 (5).2 Product #: 56000.0127¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



Serving & Holding Options: Titan® Dual DBC® 120/208V Brewer(39200.0000)



TITAN TF SERVER,
VERTICAL FCT

Product #: 39400.0001¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



