

# H5X® Element SST

Height: 28.5" Width: 7.4" Depth: 18.9"  
(72.4cm) (18.8cm) (48.0cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Programmable "Energy Saver Mode" reduces operating cost during idle periods
- The perfect tool for added control over quality coffee and tea
- Contemporary, space-saving design
- Digital thermostat provides constant and accurate temperatures of 60°- 212°F (15.6°-100°C)

Agency:



## Specifications

**Product #:** 43600.0026

**Water Access:** Plumbed

**Finish:** Stainless

**Faucet:** Upper

**Temp. Setting:** 212°F (100.000°C)

**Dispense:** Pull & Hold

## Additional Features

## Electrical & Capacity

| Volts* | Amps | Watts | Cord Attached | Plug Type | 8oz cups/hr<br>236ml cups/hr | Input H <sub>2</sub> O Temp. | Phase | # Wires plus Ground | Hertz |
|--------|------|-------|---------------|-----------|------------------------------|------------------------------|-------|---------------------|-------|
| 120    | 15.4 | 1850  | No            | -         | -                            | 60°F (15.5°C)                | 1     | 2                   | 60    |

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

## Plumbing Requirements

| PSI   | kPa     | Fitting Supplied        | Water Flow Required (GPM) |
|-------|---------|-------------------------|---------------------------|
| 20-90 | 138-621 | 1/4" Male Flare Fitting | -                         |

 **WARNING:**

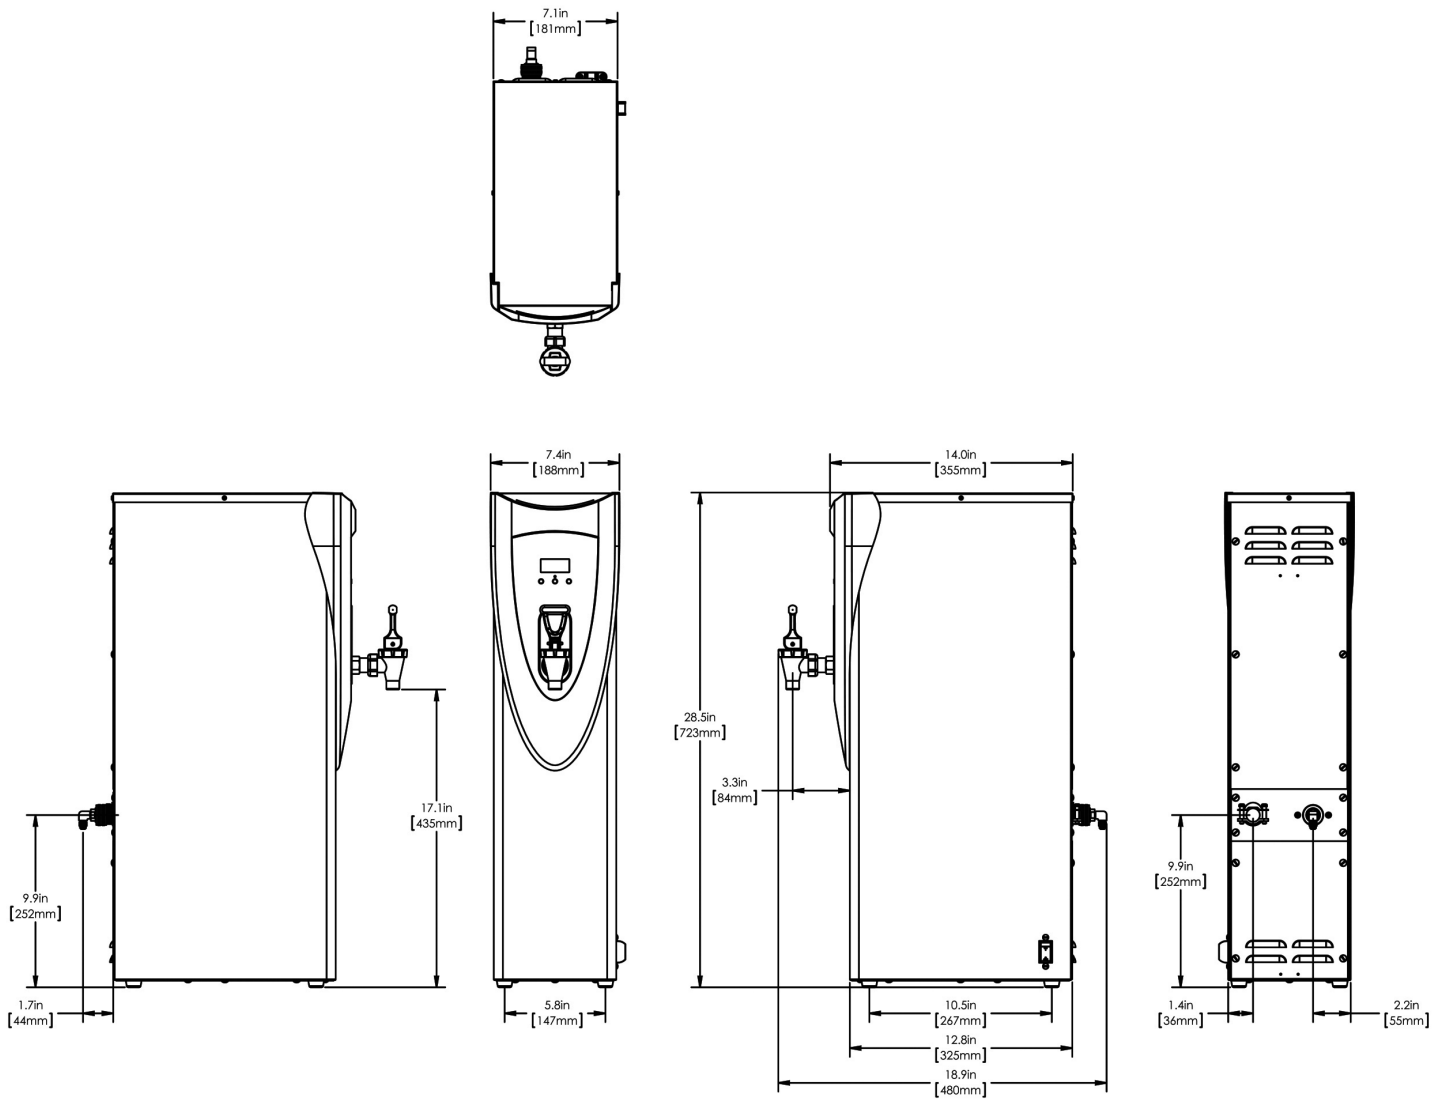
## CAD Drawings

| 2D | Revit | KLC |
|----|-------|-----|
| ●  |       |     |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit [bunn.com](http://bunn.com).



**Last Updated:**  
**07/21/2026**



| Unit    |          |         |          | Shipping |          |          |            |                       |
|---------|----------|---------|----------|----------|----------|----------|------------|-----------------------|
|         | Height   | Width   | Depth    | Height   | Width    | Depth    | Weight     | Volume                |
| English | 28.5 in. | 7.4 in. | 18.9 in. | 32.9 in. | 11.0 in. | 20.7 in. | 32.500 lbs | 4.338 ft <sup>3</sup> |
| Metric  | 72.4 cm  | 18.8 cm | 48.0 cm  | 83.7 cm  | 27.9 cm  | 52.5 cm  | 14.742 kgs | 0.123 m <sup>3</sup>  |



Related Products & Accessories:H5X® Element SST(43600.0026)

|                                                                                                                                                           |                                                                                                                                                          |                                                                                                                                                              |                                                                                                                                                               |                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>DRIP TRAY KIT (2.5\"HT-HW2)</p> <p>Product #: 02497.0000</p>         |  <p>DRIP TRAY</p> <p>Product #: 02545.0000</p>                          |  <p>COVER, DRIP TRAY-PERFORATED</p> <p>Product #: 02546.0000</p>            |  <p>FOOT, RUBBER</p> <p>Product #: 02547.0000</p>                           |  <p>KIT, SHELF</p> <p>Product #: 12599.0000</p>                       |
|  <p>WALL BRKT KIT, FRONT MTG-H5</p> <p>Product #: 13125.0003</p>         |  <p>SYSTEM, WQ-55(2)5L</p> <p>Product #: 56000.0001<sup>1</sup></p>     |  <p>SYSTEM, WQ-55(2)5</p> <p>Product #: 56000.0004<sup>1</sup></p>        |  <p>SYSTEM, WEQ-10(1.5)5L</p> <p>Product #: 56000.0024<sup>1</sup></p>     |  <p>SYSTEM, WEQ-10(1.5)5</p> <p>Product #: 56000.0027<sup>1</sup></p> |
|  <p>CARTRIDGE, WQ-55(2)5L</p> <p>Product #: 56000.0101<sup>1</sup></p> |  <p>CARTRIDGE, WQ-55(2)5</p> <p>Product #: 56000.0104<sup>1</sup></p> |  <p>CARTRIDGE, WEQ-10(1.5)5L</p> <p>Product #: 56000.0121<sup>1</sup></p> |  <p>CARTRIDGE, WEQ-10(1.5)5</p> <p>Product #: 56000.0122<sup>1</sup></p> |                                                                                                                                                          |

<sup>1</sup>NSF Certified <sup>2</sup>NSF Certified with spec sheet model listed <sup>3</sup>NSF Certified under Solventum Purification <sup>4</sup>NSF Certified under Vivreau Ltd <sup>5</sup>NSF Certified under Zojirushi <sup>6</sup>NSF Certified under Qins Inc <sup>7</sup>NSF COMPONENT Certified



## Serving & Holding Options: H5X® Element SST(43600.0026)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

<sup>1</sup>NSF Certified <sup>2</sup>NSF Certified with spec sheet model listed <sup>3</sup>NSF Certified under Solventum Purification <sup>4</sup>NSF Certified under Vivreau Ltd <sup>5</sup>NSF Certified under Zojirushi <sup>6</sup>NSF Certified under Qins Inc <sup>7</sup>NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit [bunn.com](http://bunn.com).

Last Updated:  
07/21/2026

