

ICB-DV, w/Display Group

Height: 26.8" Width: 10.2" Depth: 22.1"
(68.1cm) (25.9cm) (56.1cm)



- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

⚠ Server(s) sold separately

Agency:



Specifications

Product #: 53100.0000

Funnel: Black Plastic

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Additional Features

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	82	60°F (15.5°C)	1	2	60
120/208	14	2900	-	N/A	136	60°F (15.5°C)	1	3	60
120/240	17	4050	-	N/A	181	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00

CAD Drawings


2D	Revit	KLC
●		

⚠ **WARNING:** This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

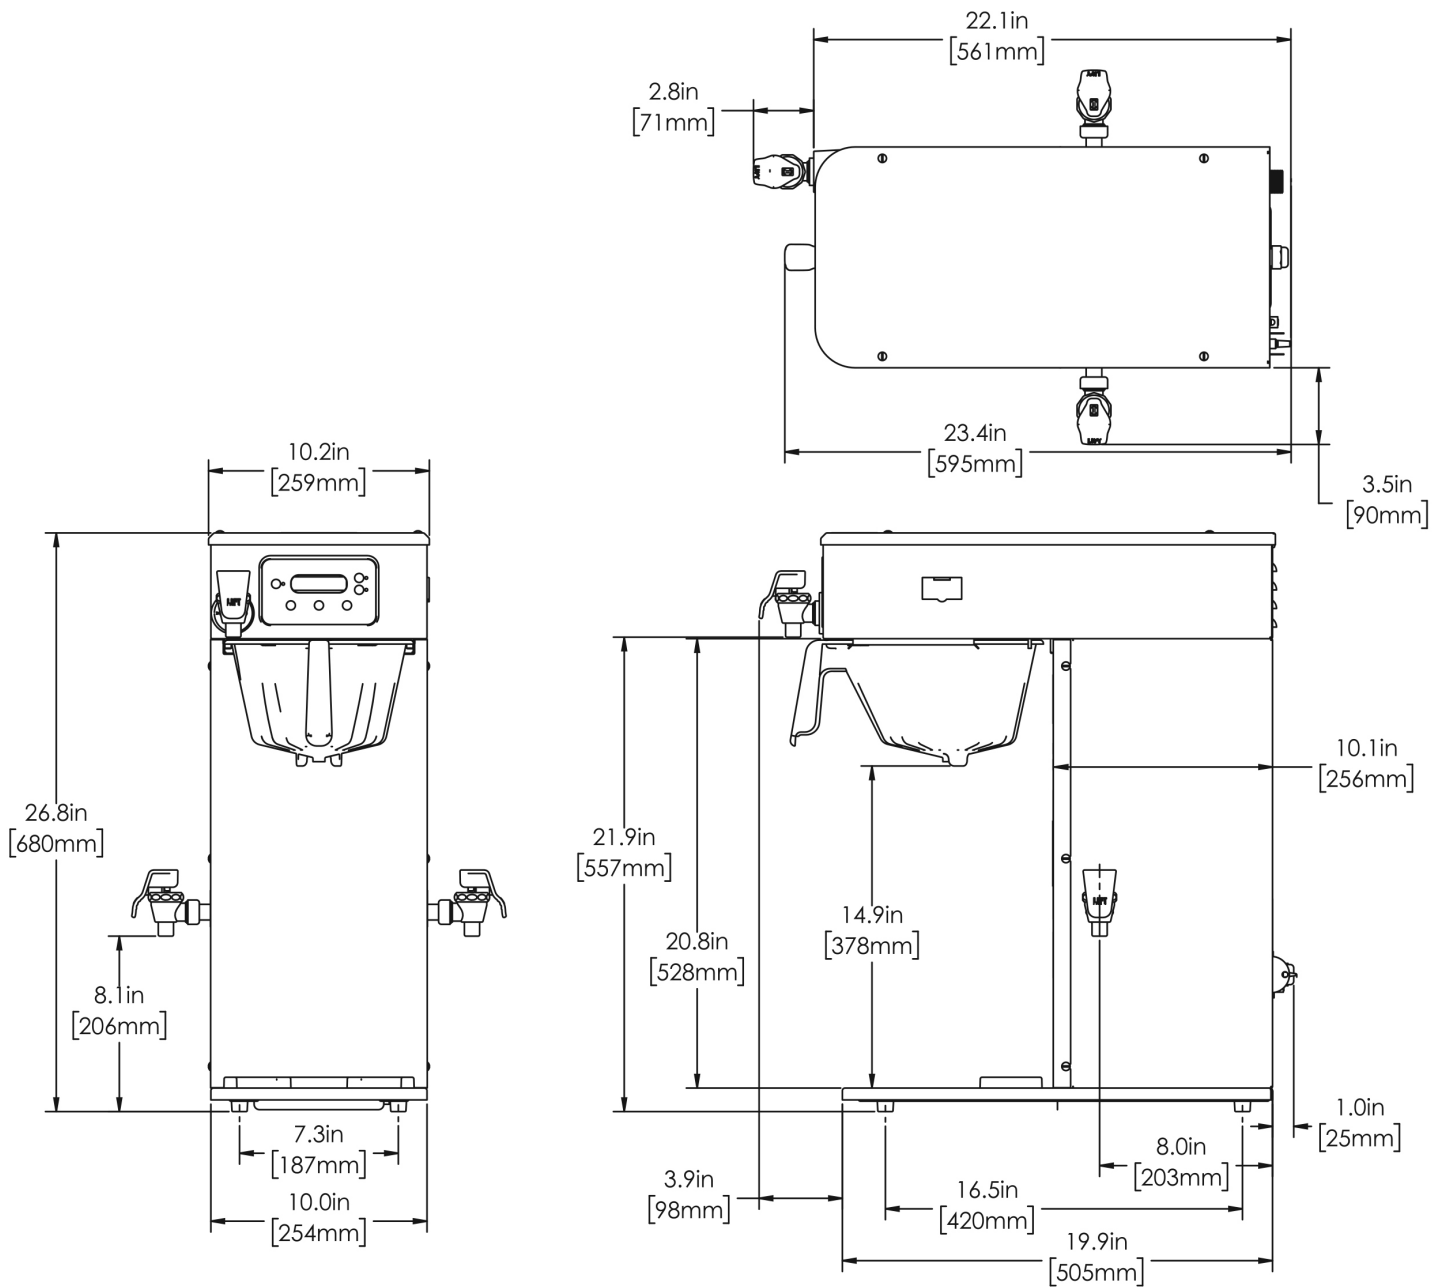

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	47.860 lbs	7.321 ft³
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	21.709 kgs	0.207 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

Related Products & Accessories:ICB-DV, w/Display Group(53100.0000)

 FILTERS, GOURMET 500 500/1 50/CL Product #: 20138.1000	 WATER FILTER, EQHP-10L Product #: 39000.0001³	 WATER FILTER, EQHP-10 Product #: 39000.0004³	 FUNNEL ASSY, SMART COFFEE BLK-CLEARED Product #: 53463.0021	 FUNNEL ASSY, SMART COFFEE BLK-CLEARED Product #: 53463.0038²
 SYSTEM, WQ-55(2)5L Product #: 56000.0001¹	 SYSTEM, WQ-55(2)5 Product #: 56000.0004¹	 SYSTEM, WEQ-10(1.5)5L Product #: 56000.0024¹	 SYSTEM, WEQ-10(1.5)5 Product #: 56000.0027¹	 CARTRIDGE, WQ-55(2)5L Product #: 56000.0101¹
 CARTRIDGE, WQ-55(2)5 Product #: 56000.0104¹	 CARTRIDGE, WEQ-10 (1.5)5L Product #: 56000.0121¹	 CARTRIDGE, WEQ-10 (1.5)5 Product #: 56000.0122¹		

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



Serving & Holding Options: ICB-DV, w/Display Group(53100.0000)

				
AIRPOT, 2.5L SST LA SINGLE PK	AIRPOT, 2.5L SST LA 6/ CASE	AIRPOT, 3.0L SST LA SINGLE PK	AIRPOT, 3.0L SST LA 6/ CASE	AIRPOT, 3.8L SST LA SINGLE PK
Product #: 32125.0000 ⁶ Mfr#:SVAP-2500F-N	Product #: 32125.0100 ⁶ Mfr#:SVAP-2500F-N	Product #: 32130.0000 ⁶ Mfr#:SVAP-3000F-N	Product #: 32130.0100 ⁶ Mfr#:SVAP-3000F-N	Product #: 36725.0000 ⁶ Mfr#:SVAP-3800F-N

				
AIRPOT, 3.8L SST LA 6/ CASE	TF SERVER, DSG2 1G SST NOBASE	TF SERVER, DSG2 1G BLK NOBASE	TF SERVER, 1G DSG GEN3 NOBASE	TF SERVER, DSG2 1.5G SST NOBAS
Product #: 36725.0100 ⁶ Mfr#:SVAP-3800F-N	Product #: 42700.0050 ¹	Product #: 42700.0051 ¹	Product #: 42700.0250 ¹	Product #: 42750.0050 ¹

				
TF SERVER, 1G/3.8L MECH NOBASE	TF SERVER, 1G/3.8L MECH BLK NOBASE	TF SERVER, 1G MECH GEN3 NOBASE	STAND ASSY, TF SERVER	STAND ASSY KIT, TF SERVER
Product #: 44000.0050 ¹	Product #: 44000.0051 ¹	Product #: 44000.0250 ¹	Product #: 54473.0000	Product #: 54473.1000

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/21/2026

