

26 3/16" Reach-in Refrigerator all Stainless Steel

Model: PLM-19RS



- Tested to NSF Standard 7 requirements for open food storage.
- Interior cabinet is full stainless steel, floor with coved corners.
- Exterior cabinet construction consists of full stainless steel front and sides.
- Bottom mounted compressor for more efficient operation in coolest area of kitchen.
- Electronic thermostat with external digital LED display for accurate control and easy reading.
- Larger fan motors and blades for more efficient air flow ensuring faster recovery times.
- Efficient condensate hot gas loop built into condensate pan for energy saving evaporation of excess condensate water.
- Environmentally friendly R290 Hydrocarbon gas.
- 3 adjustable, heavy-duty epoxy coated wire shelves.
- Self closing doors that remain open at 90 degrees.
- Magnetic door gasket is removable and replaceable without tools.
- Lockable door with foamed-in-place recessed handle.
- Front accessible, bottom mounted condensing unit is mounted on slide out rack for easy maintenance.
- Easy to mount plate casters (2 lockable) are standard with all units.


Toll Free: +1 (800) 373-8699
polarman@chefmindgroup.com
Address: 1189S Jellick Ave,
City of Industry, CA 91748




26 3/16" Reach-in Refrigerator all Stainless Steel

Model: PLM-19RS

•Certified to ANSI/NSF Standard 7



MODEL	EXTERNAL DIMENSION (inches)	V/Hz/Ph	STORAGE CAPACITY Cu-ft	SHELF CAPACITY Sq-ft	TEMPERATURE	REFRIGERANT	AMPS	CORD LENGTH	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-19RS	26 3/4 x 25 5/16 x 82 3/16	115V/60Hz/1	19	9.5	33°F-41°F	R290	3	8'	5-15P	291

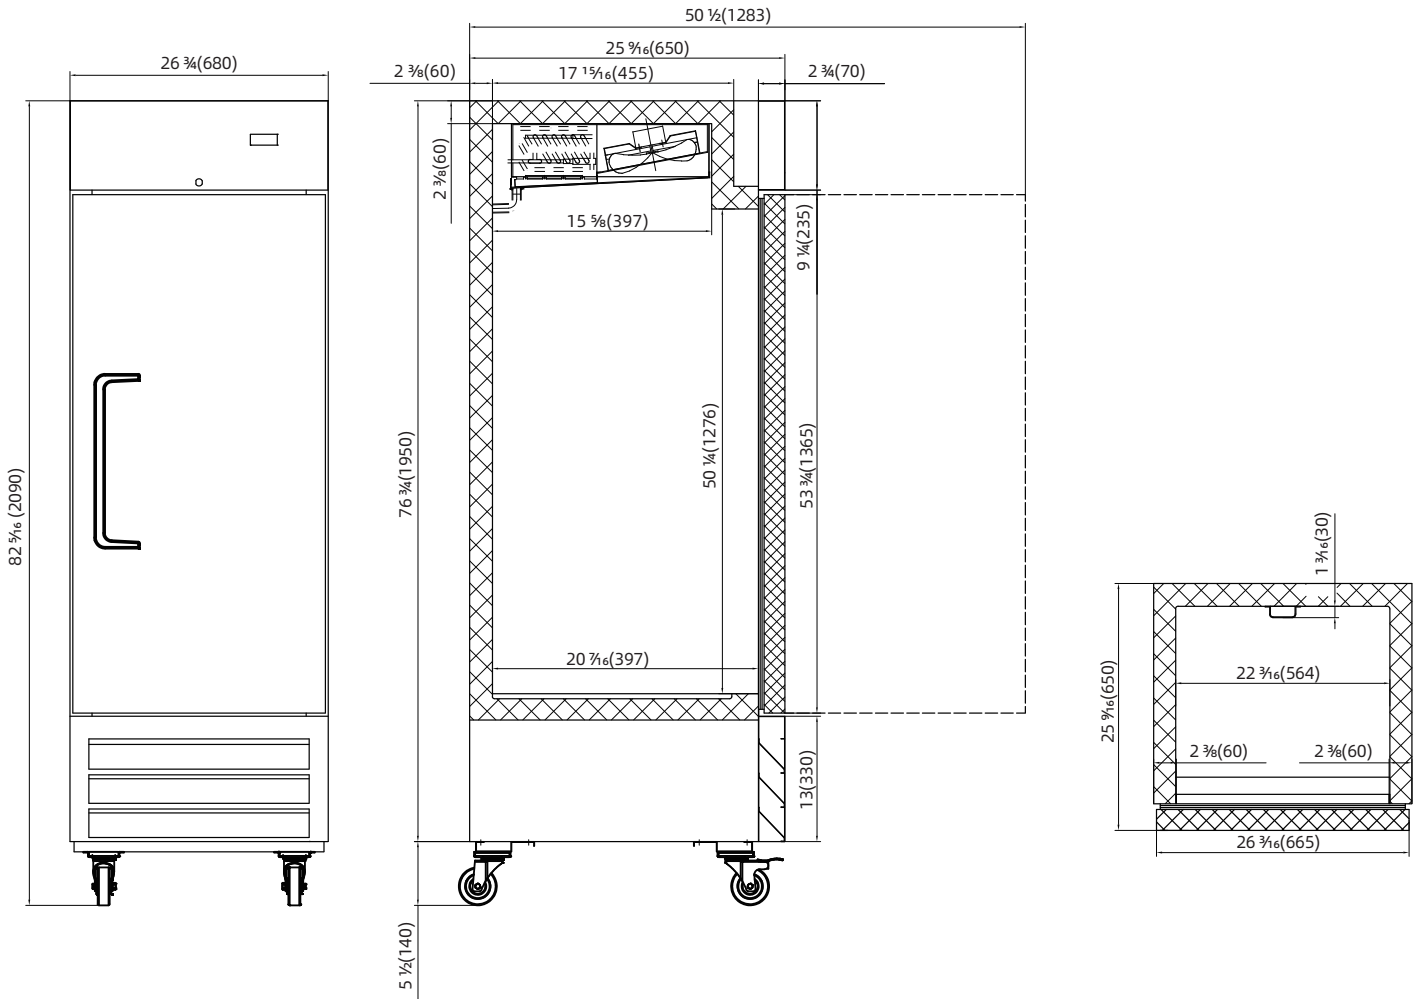

2 YEAR PARTS WARRANTY
5 YEAR COMPRESSOR WARRANTY



CHEFMIND GROUP INC.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE