Polarman
www.polarmanusa.com

53 15/16" Reach-In Refrigerator All Stainless Steel

Model: PLM-54RS

- *Tested to NSF Standard 7 requirements for open food storage.*

- *Interior cabinet is full stainless steel, floor with coved corners.*

- *Exterior cabinet construction consists of full stainless steel front and sides.*

- *Bottom mounted compressor for more efficient operation in coolest area of kitchen.*

- *Electronic thermostat with external digital LED display for accurate control and easy reading.*

- *Larger fan motors and blades for more efficient air flow ensuring faster recovery times.*

- *Efficient condensate hot gas loop built into condensate pan for energy saving evaporation of excess condensate water.*

- *Environmentally friendly R290 Hydrocarbon gas.*

- *6 adjustable, heavy-duty expoxy coated wire shelves.*

- *Self closing doors that remain open at 90 degrees.*

- *Magnetic door gasket is removable and replaceable without tools.*

- *Lockable door with foamed-in-place recessed handle.*

- *Front accessible, bottom mounted condensing unit is mounted on slide out rack for easy maintenance.*

- *Easy to mount plate casters (2 lockable) are standard with all units.*

Toll Free:+1 (800) 373-8699
polarman@chefmindgroup.com
Address: 1189S Jellick Ave,
City of Industry, CA 91748

PARTS 2YEAR WARRANTY

COMPRESSOR 5YEAR WARRANTY

energy ENERGY STAR

c ETL LISTED US Intertek

ETL SANITATION LISTED Intertek

Polarman

www.polarmanusa.com

53 15/16" Reach-In Refrigerator All Stainless Steel

Model: PLM-54RS

·*Certified to ANSI/NSF Standard 7*

NEMA 5-15P

MODEL	EXTERNAL DIMENSION inch	V/Hz/Ph	STORAGE CAPACITY Cu–ft	SHELF CAPACITY Sq–ft	TEMPERATURE	REFRIGERANT	AMPS	CORD LENGTH	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-54RS	53 15/16 x 32 11/16 x 82 5/16	115V/60Hz/1	49	28.1	33°F~41°F	R290	4.5	8'	5-15P	490
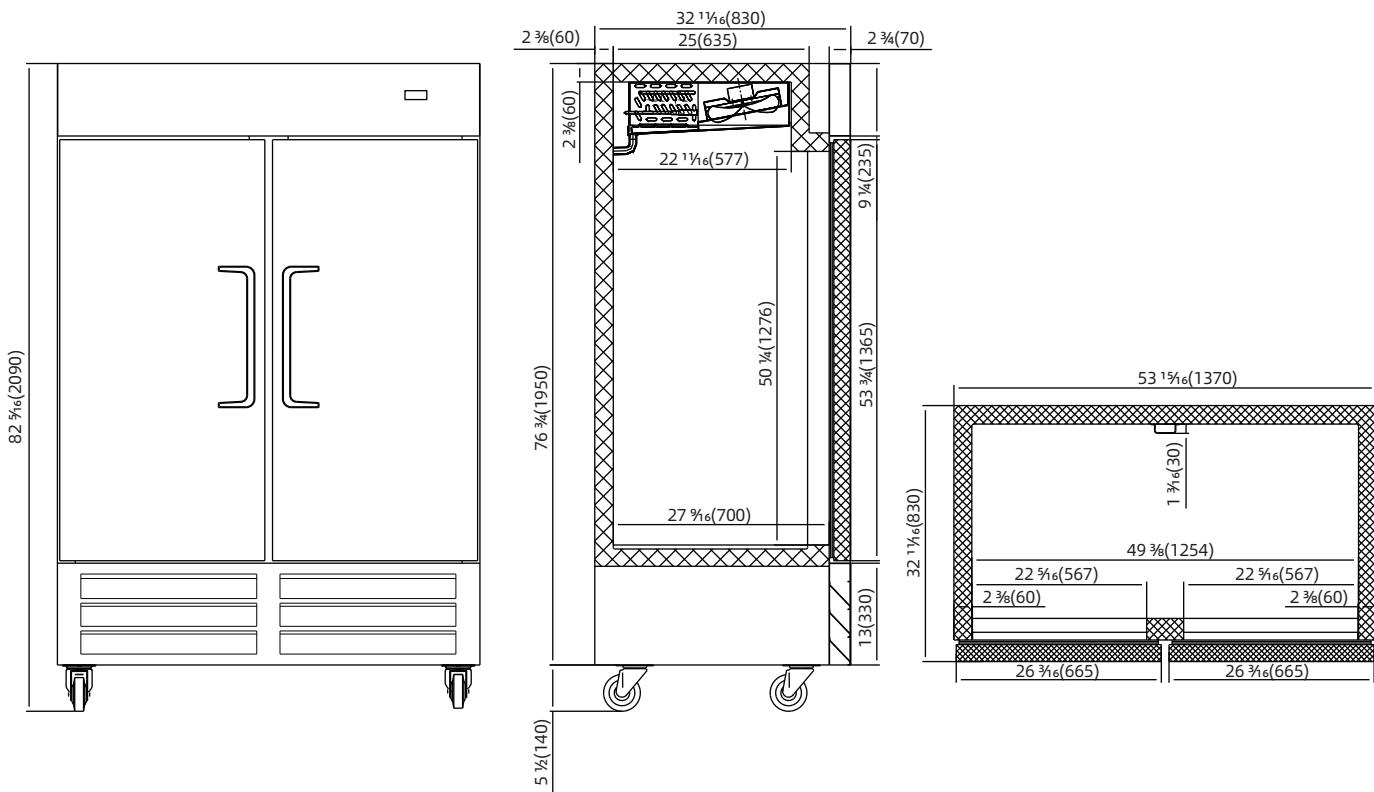
CHEFMIND GROUP INC.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE