

## 59" Countertop Refrigerated Topping Rail

### Model: PLM-PDX-60G



- Tested to NSF Standard 7 requirements for open food storage.
- Constructed from durable SUS304 stainless steel, both inside and out.
- Electronic thermostat with external digital LED display for accurate control and easy reading.
- Environmentally friendly R290 Hydrocarbon refrigerant.
- The integrated sneeze guard protects your offerings from contaminants, ensuring food safety while creating an irresistible, appetizing display.
- Accommodates up to (6) 1/3 size or (12) 1/6 size food pans (sold separately).
- Note: only the countertop refrigerated prep rail holds the ETL certification.

Toll Free: +1 (800) 373-8699  
polarman@chefmindgroup.com  
Address: 1189S Jellick Ave,  
City of Industry, CA 91748




## 59" Countertop Refrigerated Topping Rail

### Model: PLM-PDX-60G

**•Certified to ANSI/NSF Standard 7**



MODEL	EXTERNAL DIMENSION inch	V/Hz/Ph	STORAGE CAPACITY	HORSEPOWER	TEMPERATURE	REFRIGERANT	AMPS	COMPRESSOR LOCATION	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-PDX-60G	59 x 15 3/8 x 17 15/16	115V/60Hz/1	12xGN1/6	1/5 HP	33°F-41°F	R290	2	Side Mounted	5-15P	112

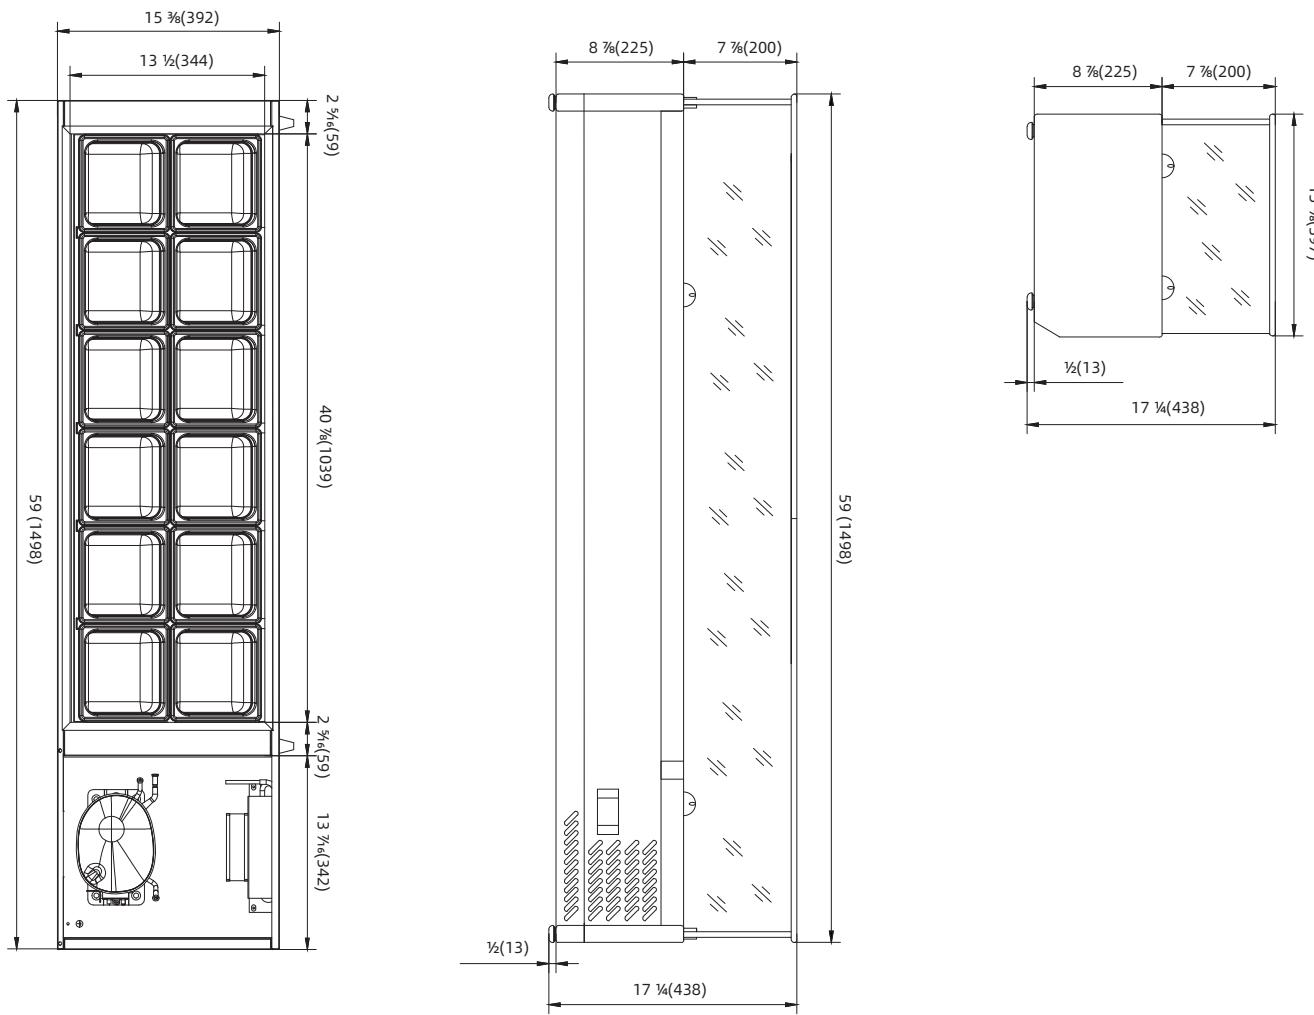

**1 YEAR PARTS WARRANTY (Not for Residential Use)**

**CHEFMIND GROUP INC.**  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Intertek

Intertek