

# 69" Countertop Refrigerated Sushi Display Case

## Model: PLM-R104L




- Tested to NSF Standard 7 requirements for open food storage.
- Brilliant internal LED illumination on top.
- Which keeps the interior temperature at a safe level between 32°F-53.6°F.
- Our display case uses R-290 refrigerant.
- It's equipped with a rear sliding glass door.
- Front Flat glass.
- Direct cooling system.
- GN pan can be ordered

**Toll Free: +1 (800) 373-8699**  
**polarman@chefmindgroup.com**  
Address: 1189S Jellick Ave,  
City of Industry, CA 91748




# 69" Countertop Refrigerated Sushi Display Case

## Model: PLM-R104L



**•ETL Certified For Safety & Sanitation**

MODEL	EXTERNAL DIMENSION (inches)	V/Hz/Ph	CAPACITY-GROSS	NET WEIGHT (lbs.)	TEMPERATURE	REFRIGERANT	AMPS	DOORS	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-R104L	69 1/10 x 15 3/8 x 14 1/8	115/60/1	5*1/2 GN	116.8	32°F to 53.6°F	R290	1.6	2	5-15P	126

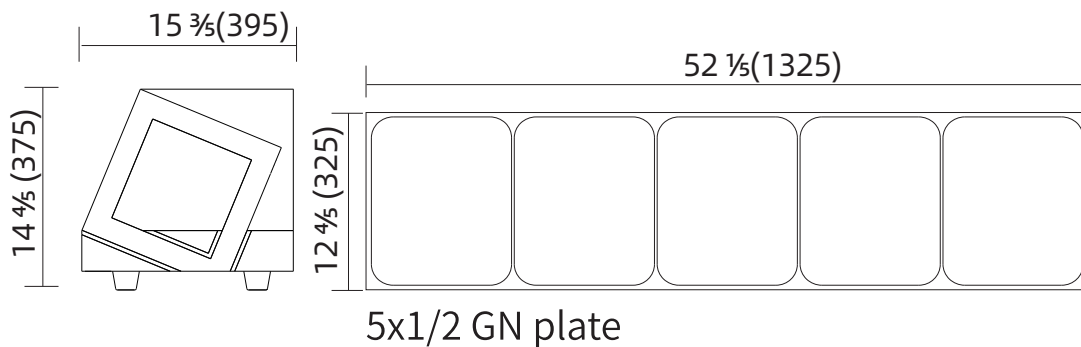

**1 YEAR PARTS WARRANTY (NOT FOR RESIDENTIAL USE)**

