

78 7/10" Refrigerated Sushi Display Case

Model: PLM-R2000L-2




- Tested to NSF Standard 7 requirements for open food storage.
- Digital temperature controller and display, that ranges from 32 to 53.6 degrees Fahrenheit.
- The cooling area prevents the equipment from overheating and achieves the cooling effect better.
- Stainless steel pans have a longer service life.
- 4 sides glass.
- Direct cooling system.
- Automatic defrost.
- With GN PAN


78 7/10" Refrigerated Sushi Display Case

Model: PLM-R2000L-2

•ETL Certified For Safety & Sanitation



MODEL	EXTERNAL DIMENSION (inches)	V/Hz/Ph	CAPACITY-GROSS	NET WEIGHT (lbs.)	TEMPERATURE	REFRIGERANT	AMPS	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-R2000L-2	78 7/10 x 15 3/8 x 16 4/8	115/60/1	9*1/3 GN	129	32°F to 53.6°F	R290	1.5	5-15P	136

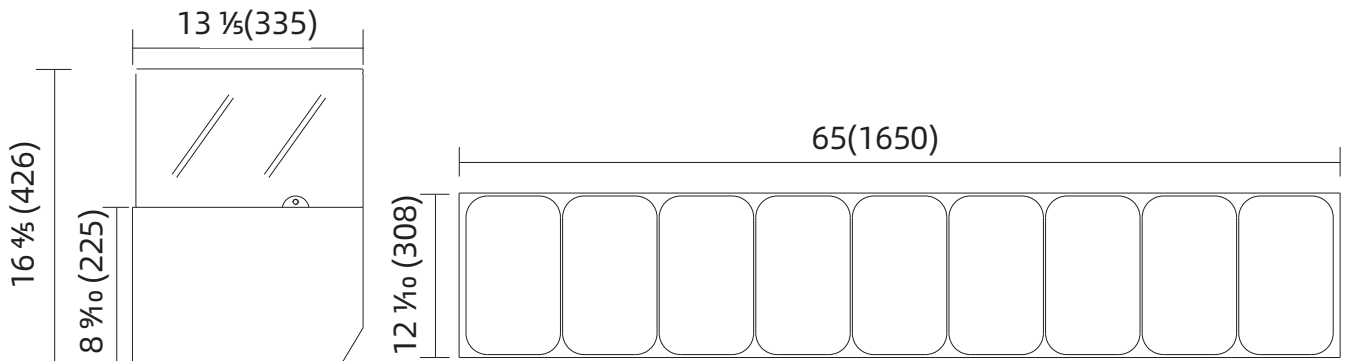

1 YEAR PARTS WARRANTY (NOT FOR RESIDENTIAL USE)



CHEFMIND GROUP INC.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE