

## 61 1/4" Under Counter Refrigerator Stainless Steel Door

### Model: PLM-UC-60S



- Tested to NSF Standard 7 requirements for open food storage.
- Interior cabinet walls are constructed of white epoxy coated steel liner with full hi-level stainless steel coved corner floor.
- Exterior cabinet construction consists of full stainless steel front and sides.
- All units come standard with heavy-duty worktop surface.
- Electronic thermostat with external digital LED display for accurate control and easy reading.
- Larger fan motors and blades for more efficient air flow ensuring faster recovery times.
- Self-contained capillary tube system using environmentally friendly R290 Hydrocarbon gas.
- 2 adjustable, heavy-duty epoxy coated wire shelves.
- Efficient condensate hot gas loop built into condensate pan for energy saving evaporation of excess condensate water.
- Vaulted self closing doors that remain open at 90 degrees.
- Magnetic door gaskets are removable and replaceable without tools.
- Refrigerator door frame have intergral factory installed heating element to eliminate condensation.
- Easy to mount casters (2 lockable) are standard with all units.


Toll Free: +1 (800) 373-8699  
polarman@chefmindgroup.com  
Address: 1189S Jellick Ave,  
City of Industry, CA 91748




# 61 1/4" Under Counter Refrigerator Stainless Steel Door

## Model: PLM-UC-60S

**•Certified to ANSI/NSF Standard 7**



MODEL	EXTERNAL DIMENSION inch	V/Hz/Ph	STORAGE CAPACITY Cu-ft	NUMBER OF DOOR	TEMPERATURE	REFRIGERANT	HP	AMPS	CORD LENGTH	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-UC-60S	61 1/4 x 29 1/4 x 35 1/2	115V/60Hz/1	15.5	2	33°F-41°F	R290	3/8	3	8'	5-15P	331

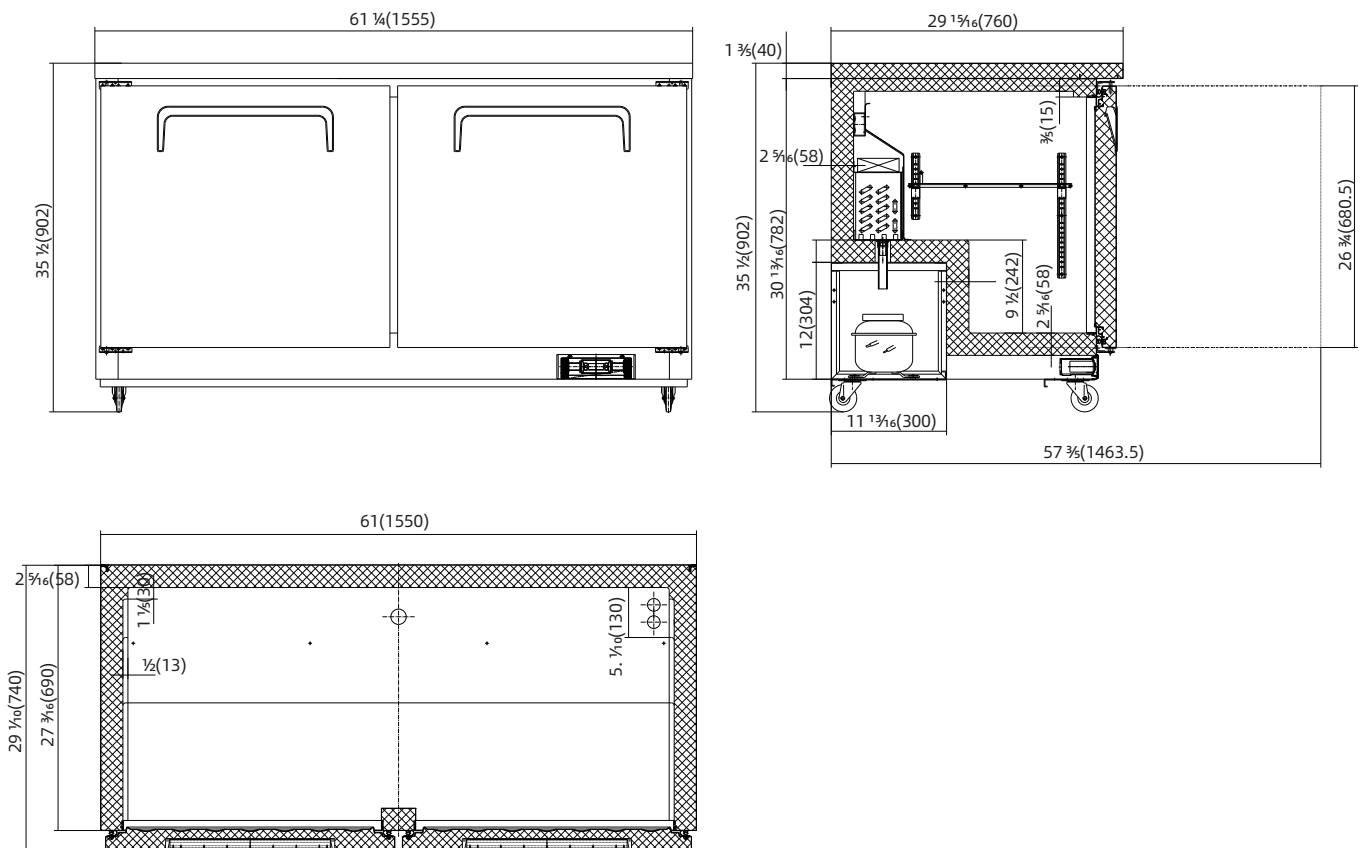

**2 YEAR PARTS WARRANTY**  
**5 YEAR COMPRESSOR WARRANTY**

