

# Flamaster

[www.flamasterusa.com](http://www.flamasterusa.com)

Project name: \_\_\_\_\_

Location: \_\_\_\_\_

Item#: \_\_\_\_\_ QTY: \_\_\_\_\_

Model#: \_\_\_\_\_

## Gas Open Pot Fryer

### Model: FLM-VF40-NG



- Open pot structure, Two models at 40 and 50 lbs capacity.
- Behind the door snap action millivolt control, Doesn't require electric connection.
- The temperature control range 200°F-400°F (93°C-205°C).
- Over temperature protection on 450°F (232°C), more than it, cut off gas.
- Four stainless steel adjustable legs.
- Large cold zone. captures and holds particles out of the heating zone, reduces taste transfer.
- Twin baskets with plastic coated handle.
- 1-1/4" full port drain valve for fast and complete oil draining.
- Open pot frypot are easy to clean with no obstruction to clean around.
- The flame transfers heat to plates located strategically outside of the frypot.
- Intense heat rapidly heats the stainless steel sides and the oil inside of the frypot.

**Toll Free: +1 800-373-8699**  
Email: [flamaster@chefmindgroup.com](mailto:flamaster@chefmindgroup.com)  
Address: 1189S Jellick Ave,  
City of Industry, CA 91748





## Gas Open Pot Fryer

### Model: FLM-VF40-NG

**•ETL design certified NSF listed**

MODEL	GAS TYPE	TOTAL BTU	OIL CAPACITY	OVERALL DIMENSIONS	NET WEIGHT	PACKAGE SIZE	Shipping Weight
FLM-VF40-NG	Natural Gas	100,000	40-50 lbs(18-21 litres)	15½ x 30½ x 45¾	138 lbs.(63 kg)	16¾ x 32¾ x 33½	156 lbs.(71 kg)

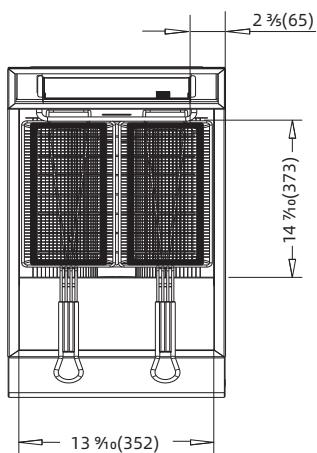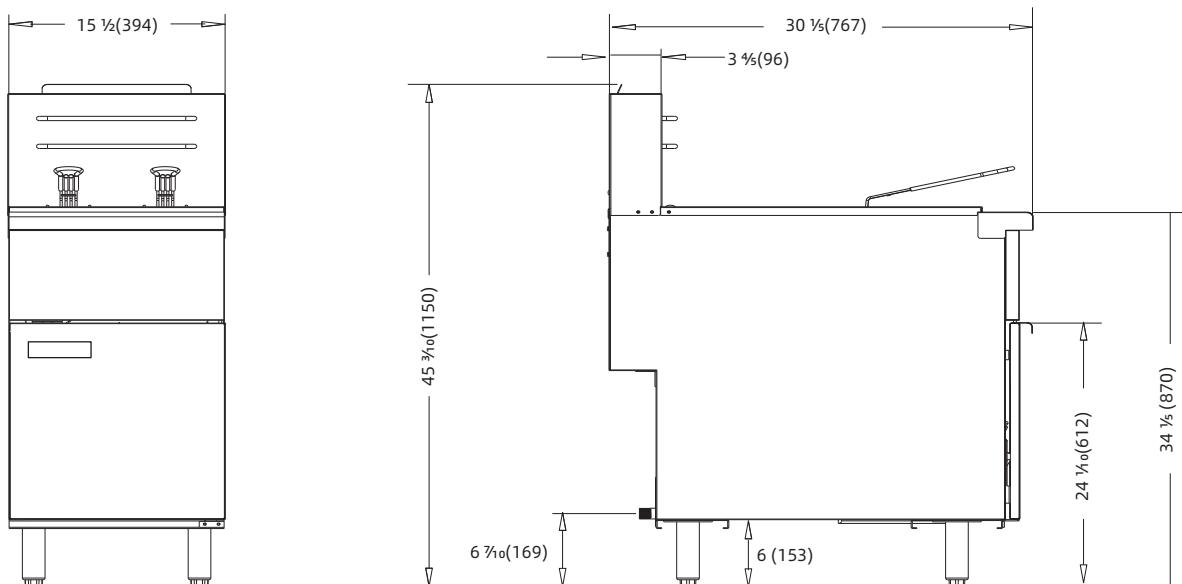

1 YEAR PARTS WARRANTY

**CHEFMIND GROUP INC.**  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Intertek



Intertek

